
Downtown Month 11 (Windy Place and Stiletto Manor)

Biggest Tip I have for this block is to double the number of cuts for the buildings on the pattern. The pattern gives the number of cuts needed for 1 building, but you are working on 2. Pay attention when cutting I1 to get the correct angle. Paper Print and good side of fabric will be opposites.

- 1. Fabrics are right side face up on opposite side from printed side. Laser ink can sometimes run onto the fabric so you always want to be sewing on the printed side and keep the good side of the fabric on the opposite side.
- 2. I use a fabric pencil to mark the sections so that I make sure I am picking up the correct fabric.
- 3. If you cannot see through the paper, fold the sew lines. This helps to judge that the fabric will cover the entire space. I always mark ¼" of where I start. Also trimming along the outer edge (include seam allowance), will help judge full coverage.
- 4. Make your stitch length is smaller so it is easier to remove the paper later. I usually click the down button twice. I would do the smallest where you could rip out the seam if you had to.
- 5. When trimming blocks, make sure you keep the seam allowance along the outside of the block.
- 6. This has a lot of small pieces. I suggest go slowly and making sure you are right on the lines to get the best results.


In case of error: Before ripping out the seam, place a piece of tape over the area that you will be ripping out on the printed side of the paper. This will keep the paper intact so that it won't start ripping until you are ready to remove the paper. I use Scotch tape. Thicker tape will make it hard to remove the paper later.





For the Stiletto Manor:

## Roof (right side):


- 1. To start, Measure ¼" from Piece A1 towards the A2. Make a crease in the paper. This will give you the ¼" seam allowance to start off the first piece.
- 2. Align Piece A1 right side up and Piece A2 wrong side up along the crease.
- 3. Sew on line between A1 and A2.
- 4. Line up card on line between A1 and A3. Fold over paper piece A3. Trim.
- 5. Add Piece A3.








Numbers on pictures refer to step

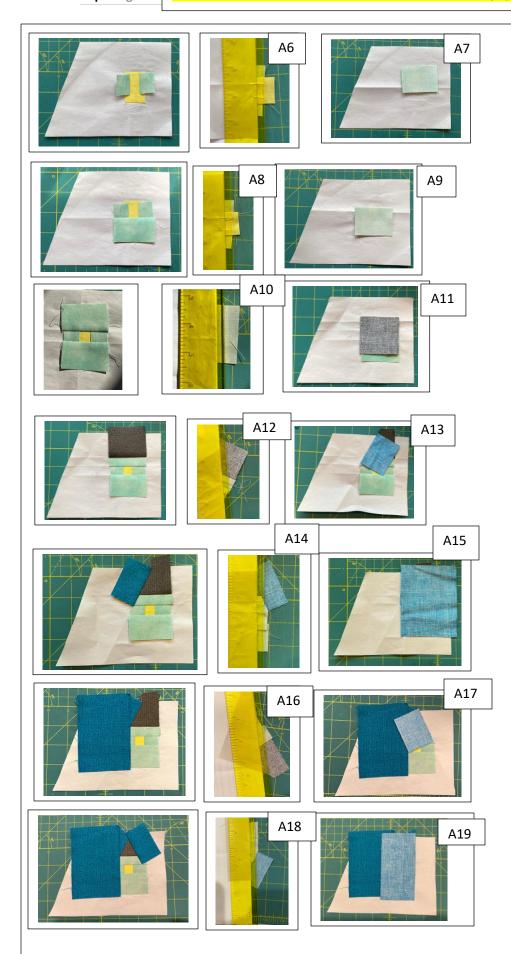


- 6. Line up card on line between A3/1/2 and A4. Fold over paper piece A4. Trim.
- 7. Add Piece A4.
- 8. Line up card on line between A3/1/2 and A5. Fold over paper piece A5. Trim.
- 9. Add Piece A5.
- 10. Line up card on line between A5 and A6. Fold over paper piece A6. Trim.
- 11. Add Piece A6.
- Line up card on line between A6 and A7. Fold over paper piece A7. Trim.
- 13. Add Piece A7.
- 14. Line up card on line between A7/5/2/1 and A8. Fold over paper piece A8. Trim.
- 15. Add Piece A8.
- Line up card on line between A6 and A9. Fold over paper piece A9. Trim.
- 17. Add Piece A9.
- 18. Line up card on line between A9 and A10. Fold over paper piece A10. Trim.
- 19. Add Piece A10.

Numbers on pictures refer to step

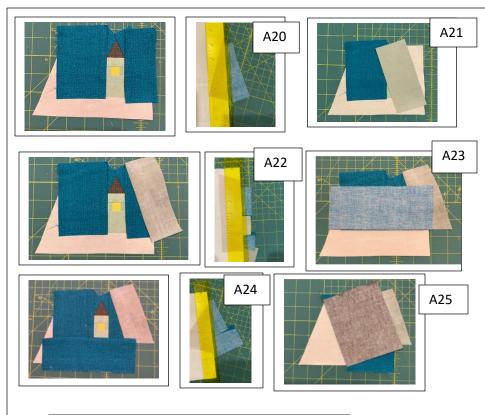

- 23. Line up card on line between A10 and A11. Fold over paper piece A11. Trim.
- 24. Add Piece A11.
- 25. Line up card on line between A10/4/8 and A12. Fold over paper piece A12. Trim.
- 26. Add Piece A12.
- 27. Line up card on line between A8/12 and A13. Fold over paper piece A13. Trim.
- 28. Add Piece A13.
- 29. Trim around entire block. Don't cut off seam allowance.



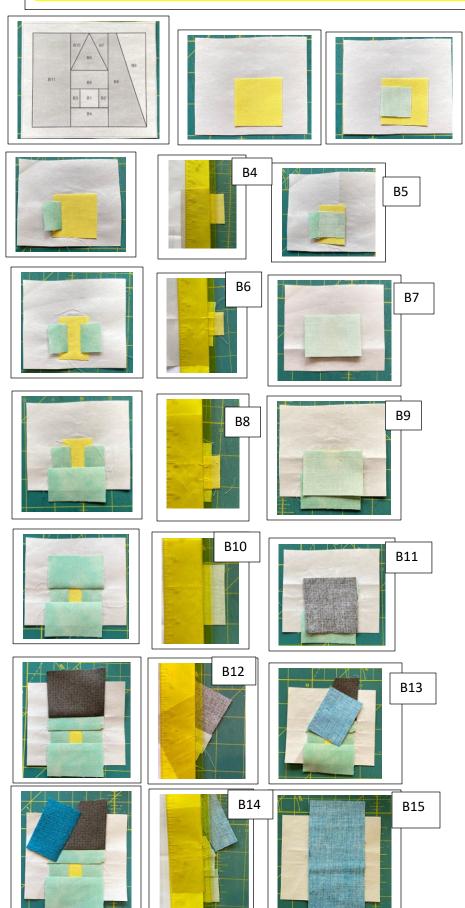



Numbers on pictures refer to step

## Roof (left side):

- To start, Measure ¼" from Piece B1 towards the B2. Make a crease in the paper. This will give you the ¼" seam allowance to start off the first piece.
- 2. Align Piece B1 right side up and Piece B2 wrong side up along the crease.
- 3. Sew on line between B1 and B2.
- Line up card on line between B1 and B3. Fold over paper piece B3. Trim.
- 5. Add Piece B3.
- Line up card on line between B3/1/2 and B4.
   Fold over paper piece B4.
   Trim.
- 7. Add Piece B4.
- Line up card on line between B3/1/2 and B5.
   Fold over paper piece B5.
   Trim.
- 9. Add Piece B5.
- Line up card on line between B5 and B6. Fold over paper piece B6. Trim.
- 11. Add Piece B6.
- 12. Line up card on line between B6 and B7. Fold over paper piece B7. Trim.
- 13. Add Piece B7.
- 14. Line up card on line between B7/5/2/4 and B8. Fold over paper piece B8. Trim.
- 15. Add Piece B8.























Numbers on pictures refer to step

- 16. Line up card on line between B8 and B9. Fold over paper piece B9. Trim.
- 17. Add Piece B9.
- 18. Line up card on line between B6 and B10. Fold over paper piece B10. Trim.
- 19. Add Piece B10.
- 20. Line up card on line between B10/5/3/4 and B11. Fold over paper piece B11. Trim.
- 21. Add Piece B11.
- 22. Trim around entire block. Don't cut off seam allowance.

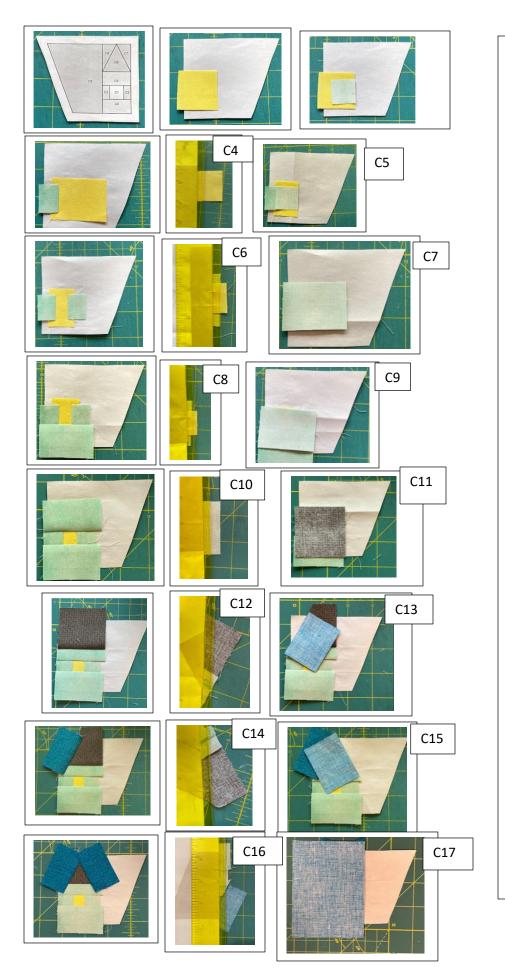

Numbers on pictures refer to step

## Roof (left side):

- To start, Measure ¼" from Piece C1 towards the C2. Make a crease in the paper. This will give you the ¼" seam allowance to start off the first piece.
- 2. Align Piece C1 right side up and Piece C2 wrong side up along the crease.
- 3. Sew on line between C1 and C2.
- 4. Line up card on line between C1 and C3. Fold over paper piece C3. Trim.
- 5. Add Piece C3.
- 6. Line up card on line between C3/1/2 and C4. Fold over paper piece C4. Trim.
- 7. Add Piece C4.
- 8. Line up card on line between C3/1/2 and C5. Fold over paper piece C5. Trim.
- 9. Add Piece C5.
- Line up card on line betweenC5 and C6. Fold over paperpiece C6. Trim.
- 11. Add Piece C6.
- 12. Line up card on line between C6 and C7. Fold over paper piece C7. Trim.
- 13. Add Piece C7.
- 14. Line up card on line between C6 and C8. Fold over paper piece C8. Trim.
- 15. Add Piece C8.
- 16. Line up card on line between C8/5/3/4 and C9. Fold over paper piece C9. Trim.
- 17. Add Piece C9.
- 18. Trim around entire block.

  Don't cut off seam

  allowance.


## **7 |** Page





























# Window (D and E):


- 1. To start, Measure ¼" from Piece D/E1 towards the D/E2. Make a crease in the paper. This will give you the ¼" seam allowance to start off the first piece.
- 2. Align Piece D/E1 right side up and Piece D/E2 wrong side up along the crease.
- 3. Sew on line between D/E1 and D/E2.
- 4. Line up card on line between D/E1 and D/E3. Fold over paper piece D/E3. Trim.
- 5. Add Piece D/E3.
- Line up card on line between D/E3/1/2 and D/E4. Fold over paper piece D/E4. Trim.
- 7. Add Piece D/E4.
- Line up card on line between D/E3/1/2 and D/E5. Fold over paper piece D/E5. Trim.
- 9. Add Piece D/E5.
- 10. Trim around entire block. Don't cut off seam allowance.



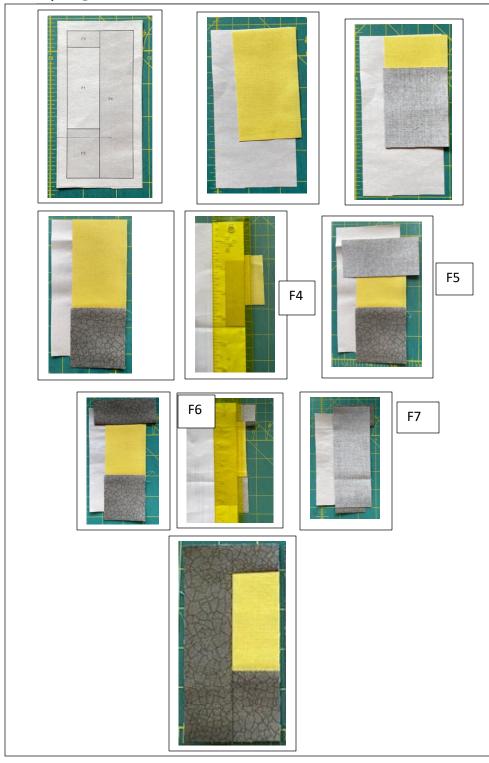

# Window (F):

- To start, Measure ½" from Piece F1 towards the F2. Make a crease in the paper. This will give you the ½" seam allowance to start off the first piece.
- 2. Align Piece F1 right side up and Piece F2 wrong side up along the crease.
- 3. Sew on line between F1 and F2.
- Line up card on line between F1 and F3.
   Fold over paper piece F3. Trim.
- 5. Add Piece F3.
- 6. Line up card on line between F3/1/2 and F4. Fold over paper piece F4. Trim.
- 7. Add Piece F4.
- 8. Trim around entire block. Don't cut off seam allowance.











# Door:


- 1. To start, Measure ¼" from Piece G1 towards the G2. Make a crease in the paper. This will give you the ¼" seam allowance to start off the first piece.
- 2. Align Piece G1 right side up and Piece G2 wrong side up along the crease.
- 3. Sew on line between G1 and G2.
- 4. Trim around entire block. Don't cut off seam allowance.




- 1. Sew Windows and Doors as shown.
- 2. Sew Roof B and C together.
- 3. Sew I1 to the bottom of piece created in step 2.
- 4. Sew piece created in step 3 to Roof (A).
- 5. Sew H1 to piece created in step 4.
- 6. Sew piece created in step 5 to piece created in step 1.










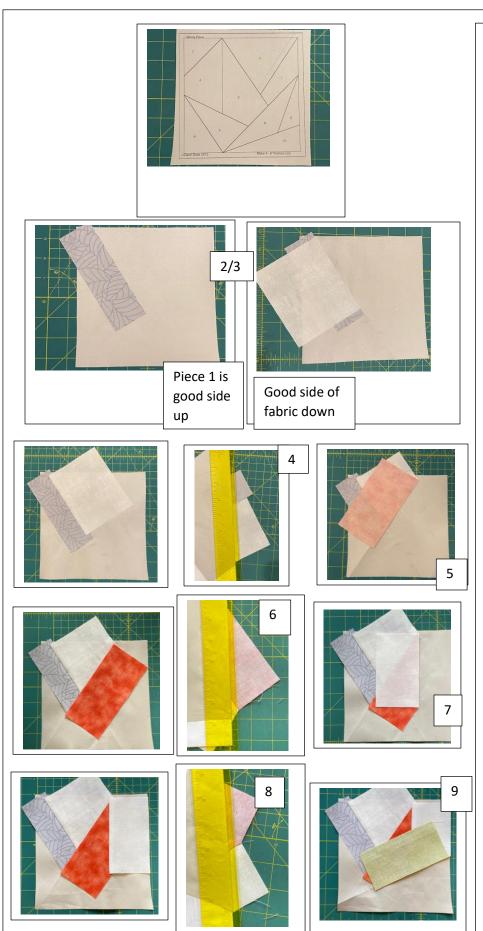

#### **Circle Drive Block:**

- To start, Measure ¼" from Piece 1 towards Piece 2.
   Make a crease in the paper. This will give you the ¼" seam allowance to start off the first piece.
- 2. Align Piece 1 right side up and Piece 2 wrong side up along the crease. You should have at least ¼" around the entire Piece 1 and Piece 2 should be able to cover the space when flipped.
- 3. Sew on line between 1 and 2.
- Line up card on line between 1/2 and 3. Fold over paper piece 3. Place the Add-A-Quarter to trim.
- 5. Add Piece 3 to trimmed section from Step 4.
- 6. Line up card on line between 3 and 4. Fold over paper piece 4. Place the Add-A-Quarter to trim.
- 7. Add Piece 4 to trimmed section from Step 6.
- Line up card on line between 4/3 and 5. Fold over paper piece 5. Place the Add-A-Quarter to trim.
- 9. Add Piece 5.

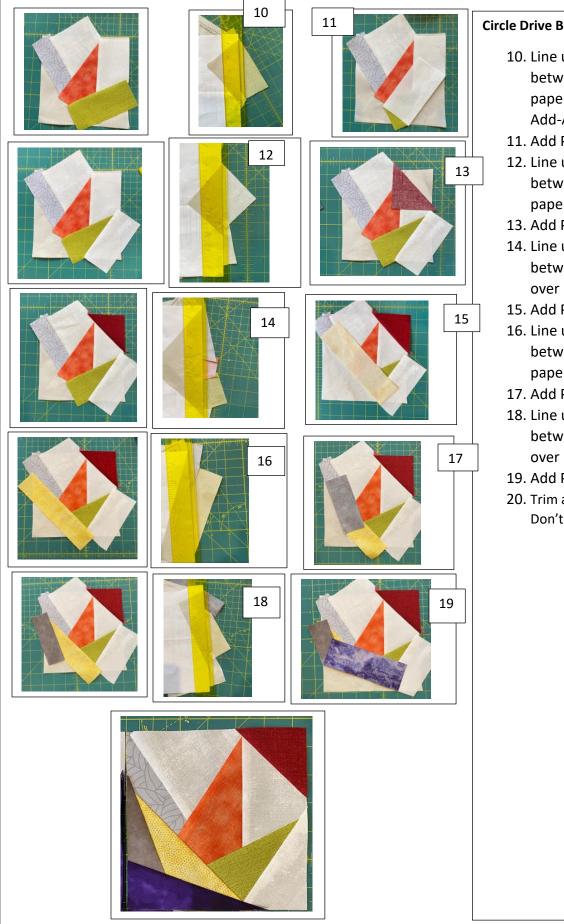

# **Circle Drive Block (cont):**

- 10. Line up card on line between 5 and 6. Fold over paper piece 6. Place the Add-A-Quarter to trim.
- 11. Add Piece 6.
- 12. Line up card on line between 4 and 7. Fold over paper piece 7. Trim.
- 13. Add Piece 7.
- 14. Line up card on line between 5/3/1 and 8. Fold over paper piece 8. Trim.
- 15. Add Piece 8.
- 16. Line up card on line between 8 and 9. Fold over paper piece 9. Trim.
- 17. Add Piece 9.
- 18. Line up card on line between 8/9 and 10. Fold over paper piece 10. Trim.
- 19. Add Piece 10.
- 20. Trim around entire block. Don't cut off seam allowance.



- 1. Place the blocks as shown.
- 2. Create 2 rows.
- 3. Sew the rows together to create the block.





# Windy Place Block

